

Technical Information

■ hebro[®]split WS

Product

hebro[®]split WS ist a release agent free of silicone for tools and forms in thermoplastics processing.

Properties

hebro[®]split WS is a highly effective, universally applicale release agent free of silicone for tools and forms in processing of thermoplastics and duroplastics.

hebro[®]split WS is used successfully during processing of acrylonitrile-butadiene-styrene (ABS), polycarbonates and a lot of other plastics.

hebro[®]split WS is free of silicone, halogens and PCB.

hebro[®]split WS is overpaintable, printable and color-stable without any problems.

hebro[®]split WS can easily be removed with hebro[®]sol 15.


hebro[®]split WS is suitable for polymers up to a temperature of 400 °C and can be applied in cold or hot forms up to about 120 °C.

Advantages

hebro[®]split WS provides a high economic efficiency due to its very good release and lubricating properties and also high effectiveness at low dosages.

hebro[®]split WS is a highly effective release agent for different kinds of plastics and is completely free of silicone, so it has no impact on your subsequent processes and ensures a high process stability.

hebro[®]split WS is free of silicone, halogens as well as PCB, which increases your occupational safety.

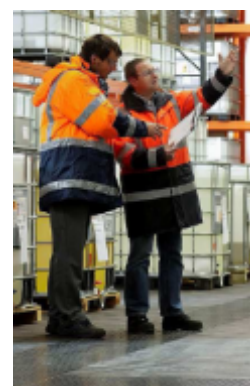

→ 2



Technical Information

2

Application area

hebro®split WS is used as release agent for tools and forms thermoplastics and duroplastics processing.



Dosage

Shake well before usage. Hold the spray vertically and apply thinly on the surface from a distance of 20-25 cm.



Technical data

Appearance:	colorless	Solubility in water:	not soluble
Odor:	characteristic	Density at 20 °C:	0.62 g/cm ³

Disposal

Empty containers may simply be disposed of via our Interseroh system.

